

## 3-LAYER INSULATED STEEL



*TF-II in brown with 24" x 12" windows*

Available in flush or raised panel designs, our 2" medium-duty thermal doors offer a clean modern look for any building. Designed to combine thermal door dependability with contemporary design to provide you with a clean, crisp look and strong insulating performance.



TF-II in white with 24" x 8" windows

## PANEL OPTIONS



## COLOR OPTIONS



Printed Colors may vary slightly from actual colors.  
Please visit your local dealer for actual color swatches.


## WINDOW OPTIONS



24" X 12"

24" X 8"

## CONSTRUCTION

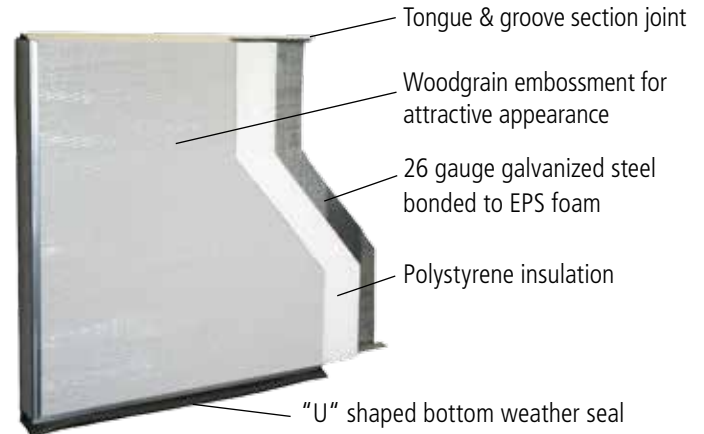

- Strong woodgrain embossed 26 gauge hot-dipped galvanized steel. Pre-finished exterior & interior, then coated with baked-on polyester primer and acrylic finish.
- 2" section thickness with flush or raised panel design.
- Polystyrene insulation bonded to 26 gauge steel skin, providing thermal protection to the edge of each section.
- Tough PVC seal provides continuous thermal break on all sections, reducing thermal transmissions.
- Uniquely designed tongue & groove section joints create a weather-resistant seal against rain, snow and wind.
- 18 gauge hot-dipped galvanized center stiles are recessed, concealed and carried the full height of the section providing superior strength and durability compared to commonly used hinge pads.
- Aluminum bottom weather seal retainer is corrosion resistant.
- Tough "U"-shaped bottom weather seal helps protect against the elements.
- Hinges are 14 gauge-minimum, hot-dipped galvanized steel for lasting durability.
- Wind load package available.
- R-value = 8.9.

For complete specifications, visit [northcentraldoor.com](http://northcentraldoor.com)

Distributed By:



As NCDC continuously strives to improve our products, all specifications listed on this brochure are subject to change without notice or obligation.

NCDC061915



WWW.NORTHCENTRALDOOR.COM


## 3-LAYER INSULATED STEEL



Available in flush or raised panel designs, our 1 3/8" medium-duty thermal doors are well-suited for larger garages or commercial settings where thermal door dependability along with contemporary design is required.



## CONSTRUCTION

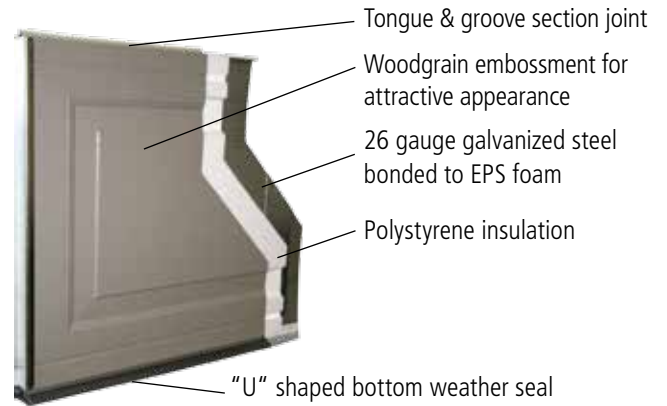

## PANEL OPTIONS



## COLOR OPTIONS



Printed Colors may vary slightly from actual colors.  
Please visit your local dealer for actual color swatches.

## WINDOW OPTIONS\*



24" X 12"

24" X 8"

\*17" x 12" window options also available.

- Strong woodgrain embossed 26 gauge hot-dipped galvanized steel. Pre-finished exterior & interior, then coated with baked-on polyester primer and acrylic finish.
- 1 3/8" section thickness with flush panel design.
- Polystyrene insulation bonded to 26 gauge steel skin, providing thermal protection to the edge of each section.
- Tough PVC seal provides continuous thermal break on all sections, reducing thermal transmissions.
- Uniquely designed tongue & groove section joints create a weather-resistant seal against rain, snow and wind.
- 18 gauge hot-dipped galvanized center stiles are recessed, concealed and carried the full height of the section providing superior strength and durability compared to commonly used hinge pads.
- Aluminum bottom weather seal retainer is corrosion resistant.
- Tough "U"-shaped bottom weather seal helps protect against the elements.
- Hinges are 14 gauge-minimum, hot-dipped galvanized steel for lasting durability.
- Wind load package available.
- R-value = 7.0

For complete specifications, visit [northcentraldoor.com](http://northcentraldoor.com)

Distributed By:



As NCDC continuously strives to improve our products, all specifications listed on this brochure are subject to change without notice or obligation.

NCDC061915



WWW.NORTHCENTRALDOOR.COM

## 3-LAYER INSULATED STEEL



*TAS-III in white with 24" x 8" windows*

For the most demanding commercial environments, the TAS-III offers superior durability and thermal efficiency. Available in a flush panel design, this 3" heavy duty insulated door delivers unmatched performance.




TAS-III interior

## PANEL OPTIONS




FLUSH


## COLOR OPTIONS




WHITE



ALMOND



SANDSTONE



BEIGE



EARTHTONE



SEPIA



BROWN



GREEN

Printed Colors may vary slightly from actual colors. Please visit your local dealer for actual color swatches. Color availability limited to certain door widths. Please contact your North Central Door dealer for more information.

## WINDOW OPTIONS




24" X 12"



24" X 8"

## CONSTRUCTION

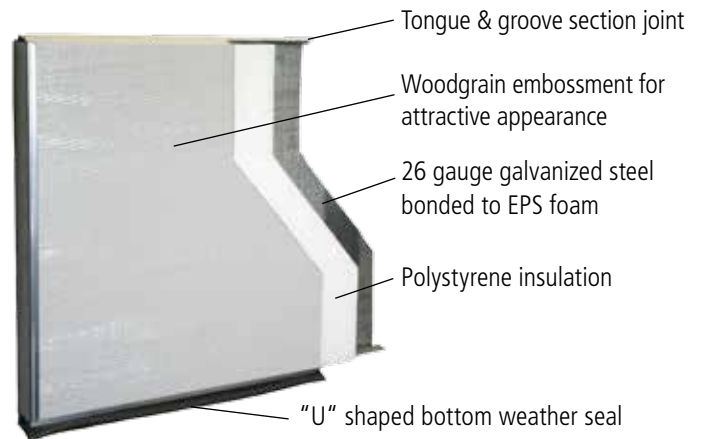

- Strong woodgrain embossed 26 gauge hot-dipped galvanized steel. Pre-finished exterior & interior, then coated with baked-on polyester primer and acrylic finish.
- 3" section thickness with flush panel design.
- Polystyrene insulation bonded to 26 gauge steel skin, providing thermal protection to the edge of each section.
- Tough PVC seal provides continuous thermal break on all sections, reducing thermal transmissions.
- Uniquely designed tongue & groove section joints create a weather-resistant seal against rain, snow and wind.
- 18 gauge hot-dipped galvanized center stiles are recessed, concealed and carried the full height of the section providing superior strength and durability compared to commonly used hinge pads.
- Aluminum bottom weather seal retainer is corrosion resistant.
- Tough "U"-shaped bottom weather seal helps protect against the elements.
- Hinges are 14 gauge-minimum, hot-dipped galvanized steel for lasting durability.
- Optional heavy-duty hardware package available.
- Wind load package available.
- R-value = 15.1.

For complete specifications, visit [northcentraldoor.com](http://northcentraldoor.com)

Distributed By:



As NCDC continuously strives to improve our products, all specifications listed on this brochure are subject to change without notice or obligation.

NCDC061915



WWW.NORTHCENTRALDOOR.COM

1-LAYER NON-INSULATED STEEL  
2 & 3-LAYER INSULATED STEEL



Nothing compares to our deep ribbed 24 and 25 gauge doors when it comes to strength and stability. They are designed to maintain structural integrity through the rigors of your toughest commercial and residential applications.



24 gauge interior

## PANEL OPTIONS




SMOOTH  
(24 gauge)




WOODGRAIN  
(25 gauge)

## COLOR OPTIONS



SMOOTH WHITE  
24 Ga.



WHITE  
25 Ga.



BROWN  
25 Ga.


Printed Colors may vary slightly from actual colors.  
Please visit your local dealer for actual color swatches.

## WINDOW OPTIONS



24" X 12"

## CONSTRUCTION

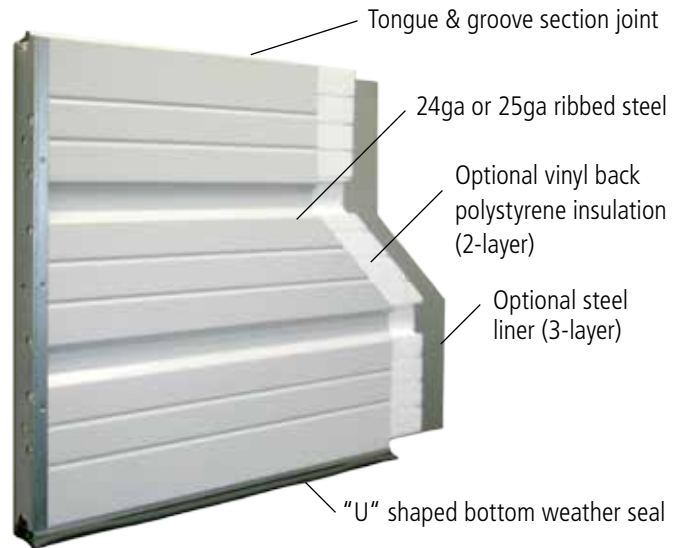

- Hot-dipped galvanized steel pre-finished with a primer coat and baked-on polyester top coat provides a beautiful, low maintenance finish.
- 24 gauge model has smooth white finish while 25 gauge model is woodgrain embossed and available in both white and brown.
- Tongue and groove section joints create a weather-resistant seal against rain, snow and wind.
- 18 gauge stiles are mechanically fastened, providing section strength while eliminating welds that often rust.
- Hinges are 14 gauge, hot-dipped galvanized steel for lasting durability.
- Heavy-duty "U" shaped bottom weather seal helps protect against elements.
- 2" sections available with optional polystyrene insulation to increase thermal efficiency.
- Optional smooth steel liner in galvanized or white.
- Wind load package available.
- R-value of 6.9 (2-layer)

For complete specifications, visit [northcentraldoor.com](http://northcentraldoor.com)

Distributed By:



As NCDC continuously strives to improve our products, all specifications listed on this brochure are subject to change without notice or obligation.

NCDC061915



**northcentral**  
DOOR COMPANY

WWW.NORTHCENTRALDOOR.COM